
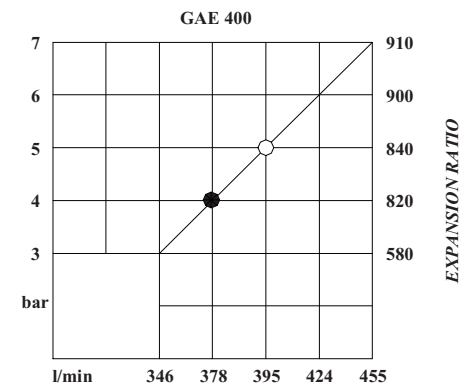


Dimensions in mm

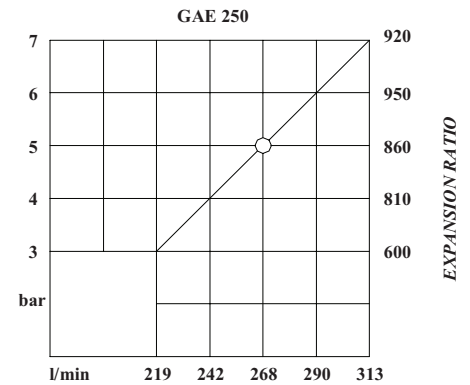

Construction features

- Body material: stainless steel AISI 316
- Inlet connection: carbon steel red epoxy painted (RAL 3000)
- Nozzle material: brass

Optional

- Zinc plated inlet connection
- AISI 304 / AISI 316 stainless steel inlet connection
- UNI / DIN, ANSI / ASA flanged inlet connection

FIRE TESTED CERTIFIED WITH PRESENCE OF SMOKE BY C.N.P.P. (France)



Technical Data

Model	Flow rate l/min-4 bar	Expansion Rate 4 bar ⁽¹⁾ ⁽²⁾	Weight Kg
GAE - 250	242	810:1	58
GAE - 250	378	820:1	59

⁽¹⁾ Test executed at 20°C in absence of wind. The expansion ratios depends on foam concentrate type.

⁽²⁾ Supplying the foam generator with fresh air is recommended unless special concentrates are used. (refer tot the foam technical data).