



Terugslagkleppen

Een terugslagklep wordt gebruikt om water in één richting door te laten. Het water duwt de klep open en bij terugstromen zal de klep sluiten. Een veer in de klep zorgt er voor dat de klep gesloten blijft. Kennedy terugslagkleppen voldoen aan de AWWA C508 norm. De kleppen zijn vervaardigd uit gietijzer en hebben een bronzen klep.



Kennedy Terugslagklep FIG 1126 A


Rubberdichtende terugslagklep, UL/FM approved.

Kennedy Terugslagklep FIG 1126

Metal seated terugslagklep, UL/FM approved.

Specificaties

Aansluiting:	ANSI of DIN flenzen
Behuizing:	Gietijzer A126 class B
Klep/zitting:	Brons B-62/NBR, of resilient seated
Klepas:	RVS 304
Coating:	Epoxy poeder coating
Drukspecs:	Working Pressure Cold water, non-shock, 175 lbs. (2½"-12") Hydrostatic Test Pressure Seat and shell, 350 PSI. (2½"-12")
Inbouwlengte:	Afhankelijk van ø; on request
Diameterrange:	2½" t/m 12"

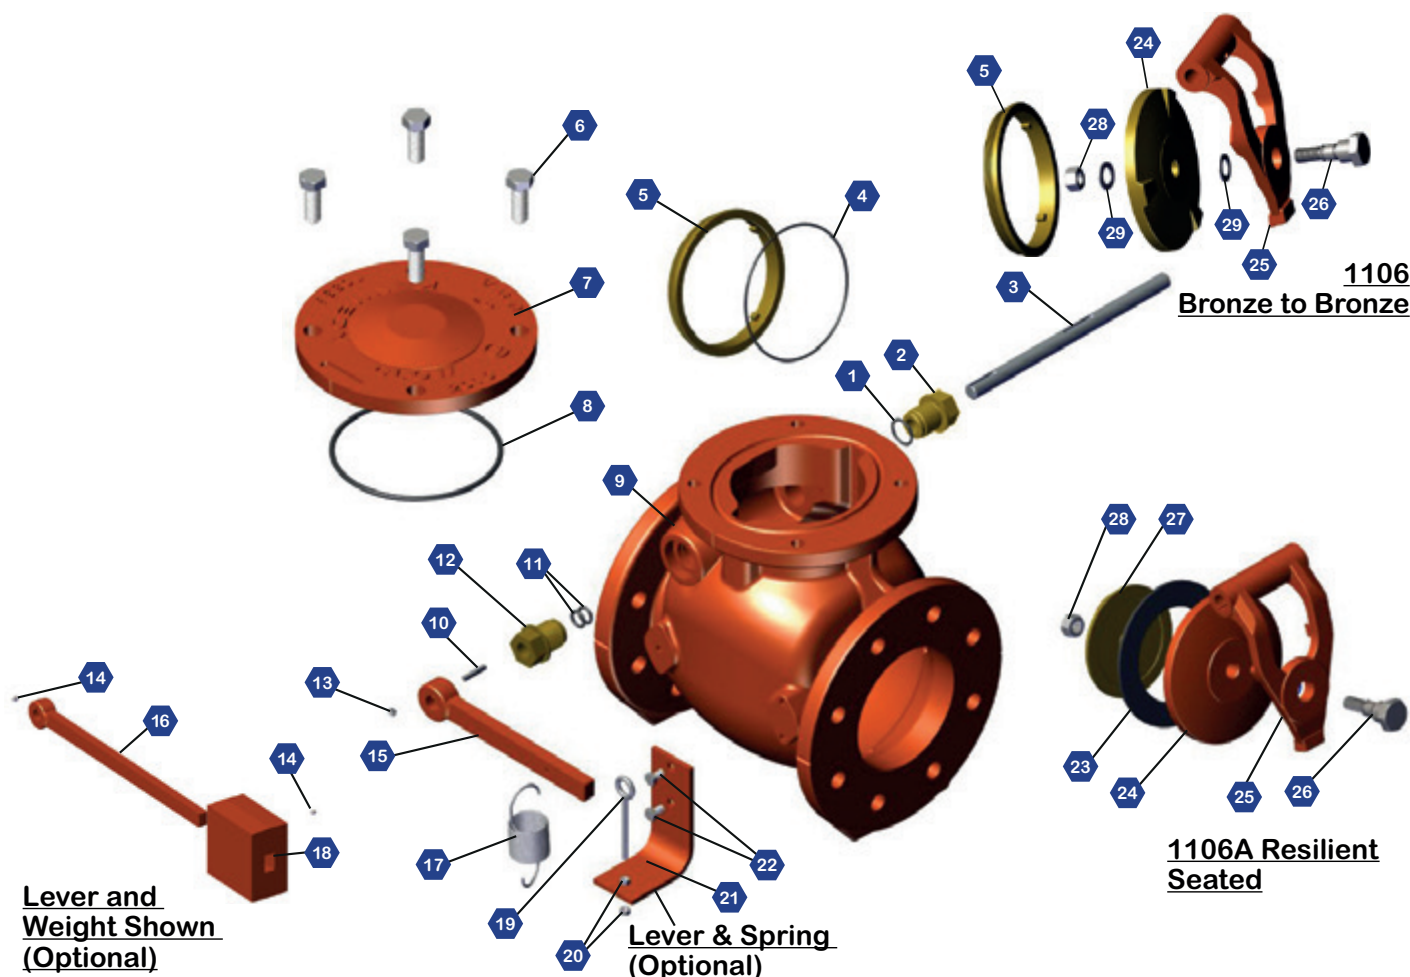

NO.	DESCRIPTION	MATERIAL	NO.	DESCRIPTION	MATERIAL
1	Side Plug O-Ring	Rubber	16	Level Arm for LW	Steel
2	Side Plug	Bronze	17	Spring	Steel
3	Extended Hinge Pin for LS / LW	Stainless Steel	18	Weight	Steel
4	Body Seat O-Ring	Rubber	19	Eye Bolt	Steel
5	Body Seat Ring	Bronze	20	Eye Bolt Hex Nuts	Stainless Steel
6	Cap Bolts	Stainless Steel	21	Bracket	Steel
7	Cap	Cast Iron	22	Hex Head Bracket Bolt	Steel
8	O-Ring	Rubber	23	Disc Seat	Rubber
9	Body	Cast Iron	24	Disc Plate	Bronze
10	Key Way	Stainless Steel	25	Hinge	Bronze
11	Stuffing Gland O-Rings	Rubber	26	Disc Bolt (4"-12")	Bronze (2"-3") Steel (4"-8")
12	Stuffing Gland	Bronze	27	Disc Plate	Bronze
13	Set Screw	Stainless Steel	28	Disc Nut	Stainless Steel
14	Set Screw for LW	Stainless Steel	29	Disc Gasket Bolt	Stainless Steel
15	Level Arm for LS	Steel			